


技术指标

@T_A=25±2°C 无特别规定时


项目	单位	最小值	典型值	最大值	
中心频率	MHz	-	1588.0	-	
带宽	MHz	-	20	-	
最小插入损耗	dB	-	3.8	4.0	
插入损耗	dB	-	4.2	6.0	
带内波动	dB	-	1.0	2.0	
群时延波动	ns	-	20	40	
输入输出驻波比	ratio	-	1.6:1	2.0:1	
阻带抑制	DC-1100.00MHz	dB	50.0	55.0	-
	1100.00-1548.00MHz	dB	40.0	45.0	-
	1563.00MHz	dB	20.0	25.0	-
	1613.00MHz	dB	8.0	20.0	-
	1628.00-2000.00MHz	dB	40.0	45.0	-
	2000.00-2700.00MHz	dB	36.0	42.0	-
	2700.00-3000.00MHz	dB	35.0	40.0	-
相位一致性	deg.	-	-	-	
幅度一致性	dB	-	-	-	
输入输出阻抗	Ω	-	50	-	
最大输入功率	dBm	-	20	-	
工作温度	°C	-	-40 ~ +85	-	
存储温度	°C	-	-40 ~ +85	-	
材料	-	-	-	-	
RoHS	-	-	是	-	
静电敏感器件	-	-	是	-	
防潮等级	-	-	MSL 1	-	
订单数量	pcs	20		3000	


外形结构

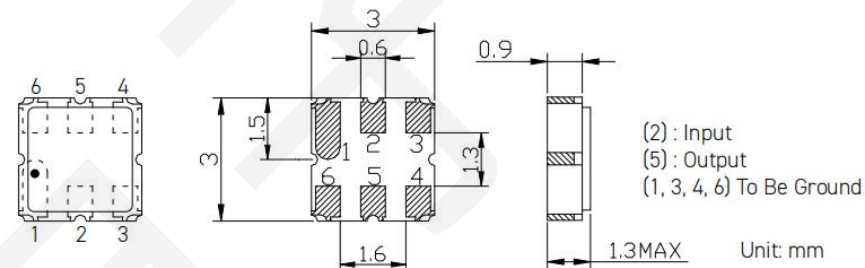



丝印说明	散货打标方式	整卷打标方式
	中心频率: xxxxx	型号: SAWxxxx
	Pin 1: ●	Pin 1: ●
	-	批次号: 月年日, 如: 04B22


测试电路

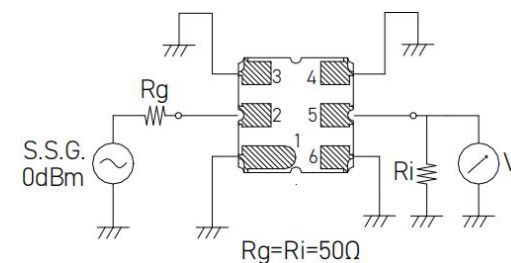





频率特性

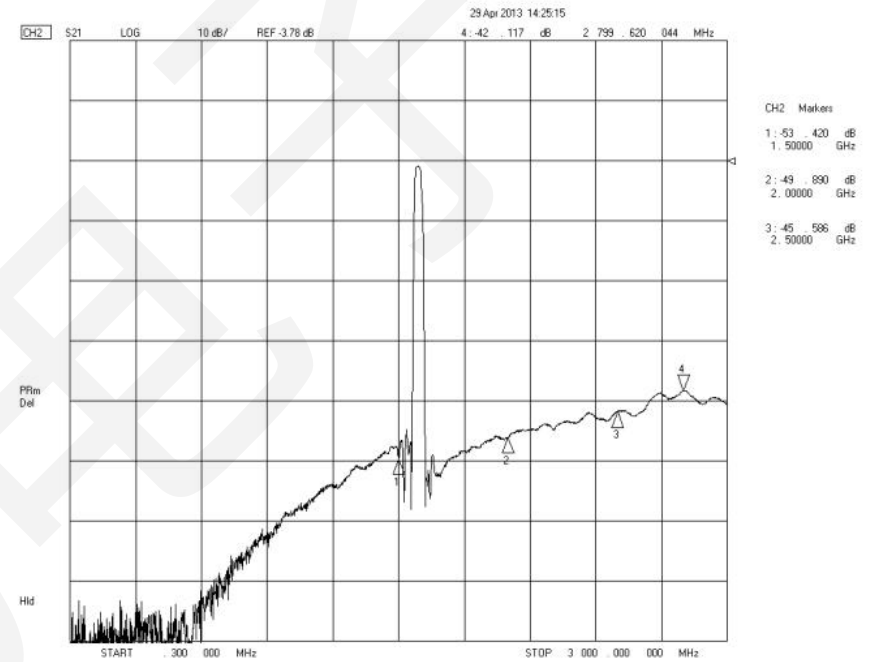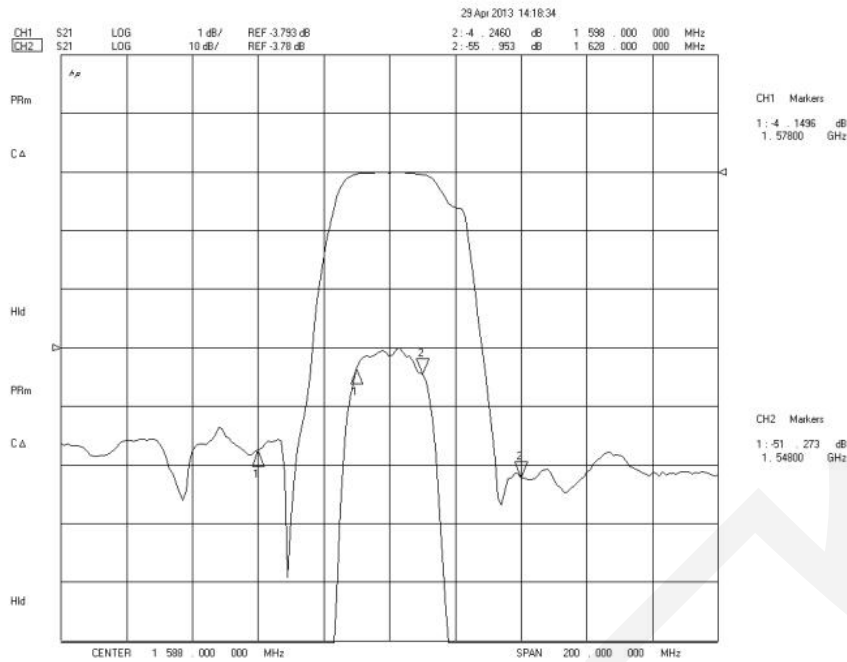



卷盘尺寸

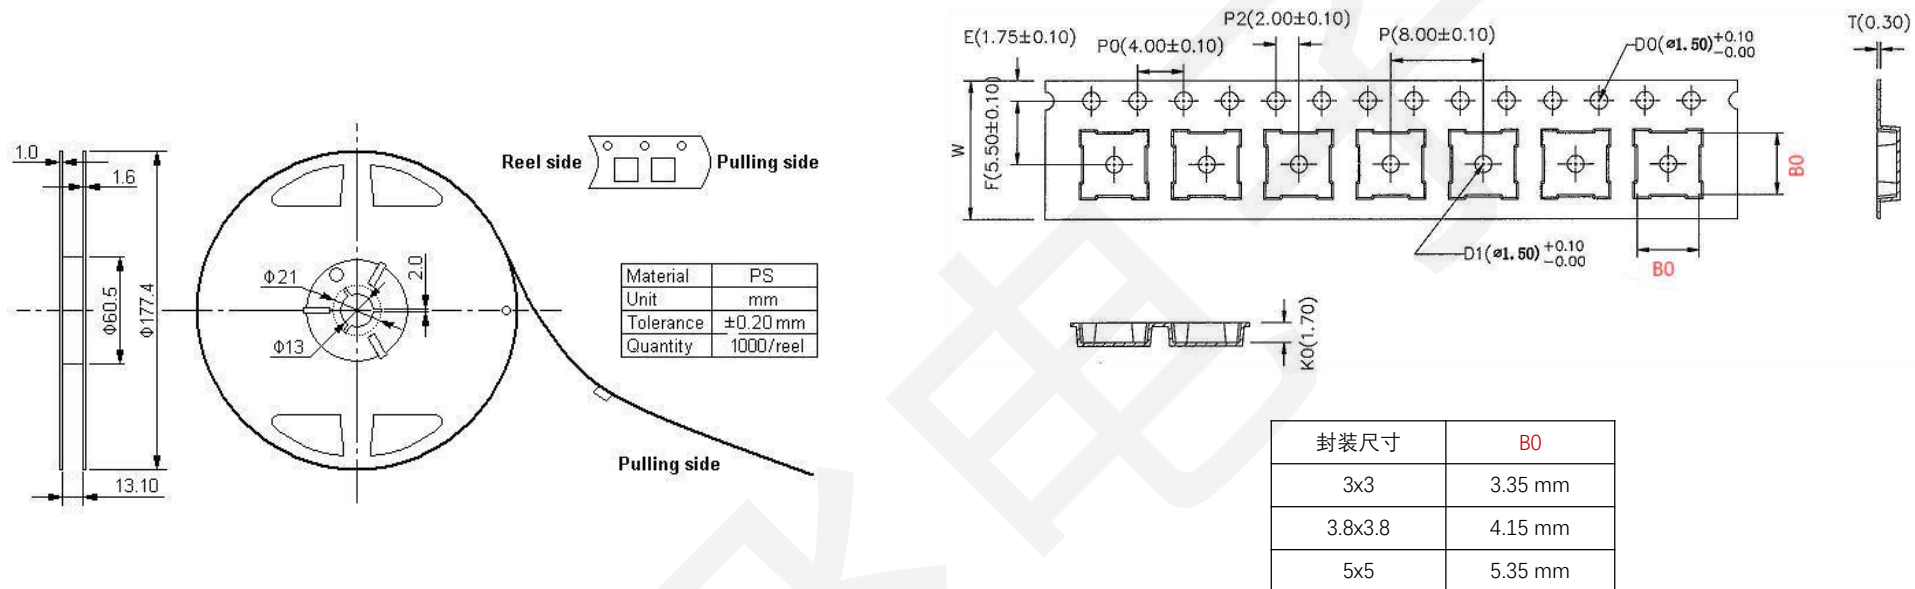



推荐回流焊炉温曲线图

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (20~40sec).
4. Time: 2 times.

